



TESTED TO COMPLY WITH BOTH

**ASTM  
E3022**  
Standard

**Rolls-Royce  
RRES 90061**  
Requirements

**SPECTROLINE®**  
NDT

# TRITAN™ 365

## UV-A LED Hand-Held Lamp

TRI-365SBLC

### Key Features:

- ▶ Nominal steady-state UV-A intensity of less than  $5,000 \mu W/cm^2$  at 15 inches (38 cm).
- ▶ Large 4 inch (10 cm) diameter coverage area at 15 inches (38 cm), with a minimum UV-A intensity of  $2,500 \mu W/cm^2$ .
- ▶ Low visible light emission—less than 0.5 foot-candle (5 lux).
- ▶ Long-lasting UV-A lenses reduce the rate of solarization.
- ▶ Thermal cut-off circuitry prevents lamp from going out of compliance when internal temperature exceeds specifications.
- ▶ **Certificate of Conformance** and **full serialized validation report** for both output and wavelength measurements supplied with each lamp.



**LONG-LASTING  
UV-A LENSES**  
Reduce the rate of  
solarization

**WHITE LIGHT LED**  
Allows for scanning  
surface flaws

Faceplate with  
**INTEGRAL  
BLACK LIGHT  
FILTERS**

**RUBBER BUMPER**  
with Borofloat® glass lens  
protects LEDs from damage

**BUILT-IN FANS**  
Maintain optimum  
light output

**EASY CONTROL**  
Grip-mounted, three-  
way rocker switch  
(white light/off/UV)

**THERMAL CUT-OFF CIRCUITRY**  
Prevents lamp from going out of compliance when  
internal temperature exceeds specifications

**TWO CORD CHOICES**  
Standard or extra-long  
with AC plug and rubber boot

# TRITAN™ 365

- Fully compliant to ASTM E3022 and Rolls-Royce RRES 90061 for LED UV-A lamps.
- Faceplate with integral blacklight filters reduce output of wavelengths longer than 400 nm.
- White light LED allows for scanning of surface flaws or illuminating dark work spaces.
- Grip-mounted, three-way rocker switch (white light/off/UV) for easy control of light sources.
- Built-in fans keep LEDs cool to maintain optimum light output during extended use.
- Choice of standard 8 foot (2.4 m) or extra-long 20 foot (6.1 m) heavy-duty power cord with AC plug and rubber boot.
- Meets ASTM UV-A intensity and wavelength specifications for LPT and MPT.
- UV-absorbing spectacles and soft carrying case included.

MODEL	NOMINAL STEADY-STATE UV-A (365 NM) INTENSITY at 15 inches (38 cm) ①	VISIBLE LIGHT MEASUREMENT	DIAMETER OF UV-A COVERAGE AREA at 15 inches (38 cm)
TRI-365SBLC	< 5,000 $\mu\text{W}/\text{cm}^2$ maximum	< 0.5 foot-candle (5 lux)	4 inch (10 cm)

<b>Light Source:</b>	3 UV-A LEDs, 1 White Light LED
<b>Lamp Style:</b>	Pistol grip
<b>Lamp Head Diameter:</b>	3.25 in (8.25 cm)
<b>Length:</b>	8.0 in (20.3 cm)
<b>Weight:</b>	1 lb (454 g)
<b>White Light LED Intensity:</b>	400 foot-candles (4,306 lux)
<b>Power Requirements:</b>	120VAC* Power cord

\*Also available in 230V, 240V and 100V versions.

① UV-A intensity reading taken with the Spectrolin<sup>®</sup> AccuMAX™ Series meter, and is factory set to the value shown.



SPECTROLIN <sup>®</sup> VALIDATION REPORT				
TEST DESCRIPTIONS	PARAMETERS	TYPE TEST	NOMINAL	UNIT TEST
MODEL NUMBER: TRI-365SBLC STANDARD: Rolls Royce RRES 90061				
		SERIAL NUMBER:		
		PART NUMBER:		
Minimum Working Distance	1,000 $\mu\text{W}/\text{cm}^2$	INITIAL SWITCH ON	15 inches (38.1 cm)	NA
Maximum Working Distance	1,200 $\mu\text{W}/\text{cm}^2$	AFTER 1h	20 inches (50.8 cm)	NA
Peak Wavelength	365 $\pm$ 5 nm	300 $\pm$ 2 nm	367 $\pm$ 2 nm	368 $\pm$ 2 nm
50% Max PW < 20 nm (FWHM)	20 $\pm$ 1 nm	20 $\pm$ 1 nm	20 $\pm$ 1 nm	20 $\pm$ 1 nm
50% Max PW < 30 nm	5 $\pm$ 0.5 nm	5 $\pm$ 0.5 nm	5 $\pm$ 0.5 nm	5 $\pm$ 0.5 nm
50% Max PW < 40 nm	2.2 $\pm$ 0.1 nm	2.2 $\pm$ 0.1 nm	2.2 $\pm$ 0.1 nm	2.2 $\pm$ 0.1 nm
50% Max PW < 50 nm	1.0 $\pm$ 0.05 nm	1.0 $\pm$ 0.05 nm	1.0 $\pm$ 0.05 nm	1.0 $\pm$ 0.05 nm
Wavelength Drift	30nm to 370nm	Acceptable	Acceptable	Acceptable
Visible Light	<20 Lux at Minimum Dist. (0.20 ft) at Min. (0.20 ft) at Min. (0.20 ft) at Min.	2.55 Lux	2.15 Lux	2.05 Lux
Output	<5 Lux at Maximum Dist. (0.20 ft) at Min. (0.20 ft) at Min. (0.20 ft) at Min.	2.15 Lux	2.05 Lux	2.05 Lux
Output Stability	7% $\pm$ 20% intensity drop, 10% variation over 30 mins	NA	5 minutes	30 minutes
Ambient Temperature	50 degrees C to 50 degrees C	25 degrees C	25 degrees C	50 degrees C
Source Life*	75,000 $\pm$ 70% initial intensity	75,000 h	75,000 h	NA
	75,000 $\pm$ 10% initial intensity	20,000 hours	20,000 hours	NA


✓ VALIDATION REPORT

SPECTROLIN <sup>®</sup> CERTIFICATE OF CONFORMANCE			
MODEL NUMBER:	STANDARD:	SERIAL NUMBER:	PART NUMBER:
TRI-365SBLC	Rolls Royce RRES 90061		
APPROVED BY: [Signature]			
DATE: [Date]			
TESTED BY: [Signature]			
DATE: [Date]			
INSPECTOR: [Signature]			
DATE: [Date]			

✓ CERTIFICATE OF CONFORMANCE

## UV-A BEAM PROFILE

SURFACE CONTOUR PROFILE AT 15 IN (38 CM)

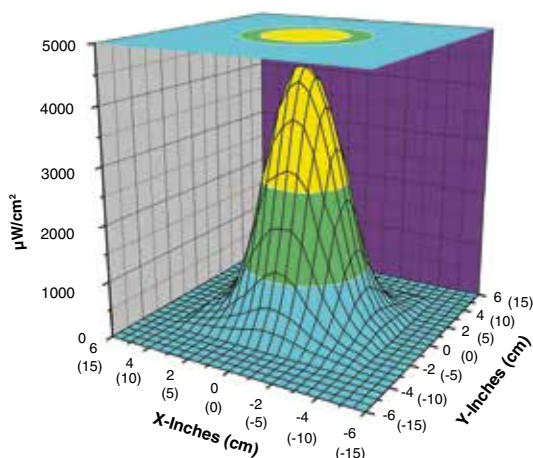

TOP INTENSITY PROFILE AT 15 IN (38 CM)

